



- Android system, rapid operation respond
- 2/4 channels, 100MHz / 150MHz bandwidth
- 1G Sa / S real-time sample rate, Up to 70Mpts memory depth
- Up to 130,000 times/s waveform capture rate
- 8" industrial LCD, 800 \* 600 resolution multi-point capacitive touch screen
- Support LAN, WiFi, USB2.0, USB Device, HDMI, Trigger out
- Support Bus trigger and decoding (UART,I2C,SPI,CAN,LIN)
- Support PC software, APP(iOS and Android mobile phone) to remote control oscilloscope
- Built-in 8G storage support various types waveform and video record
- Optional lithium battery, battery life up to 5 hours


## STO1000 Series Smart Oscilloscope

# DATA SHEET

# STO1000 Series Smart Oscilloscope


STO1000 is Micsig's newest portable smart 2/4-Channel oscilloscope model, with 100/150MHz bandwidth, 1GSa/s sample rate, Up to 70Mpts memory depth, and up to 130,000 wfm/s waveform capture rate. Adopting high-sensitivity digital trigger system, the trigger jitter is small, support serial bus trigger and decoding; it also equipped with various measurements and mathematical functions; standard digital filter module, 256-level waveform grayscale display and color temperature display; compatible with ports like LAN, Wi-Fi, USB 2.0, USB Device, HDMI, Trigger out; 800 \* 600 8-inch capacitive touch screen and highly integrated control panel

## Product appearance

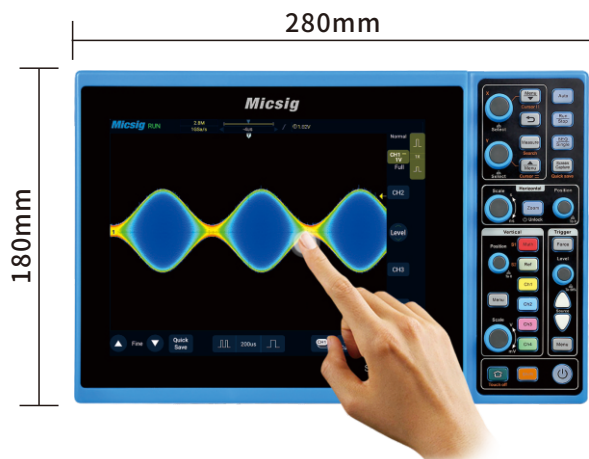

Weight: 4CH Oscilloscope 1425g Battery 320g

### Independent Control Panel

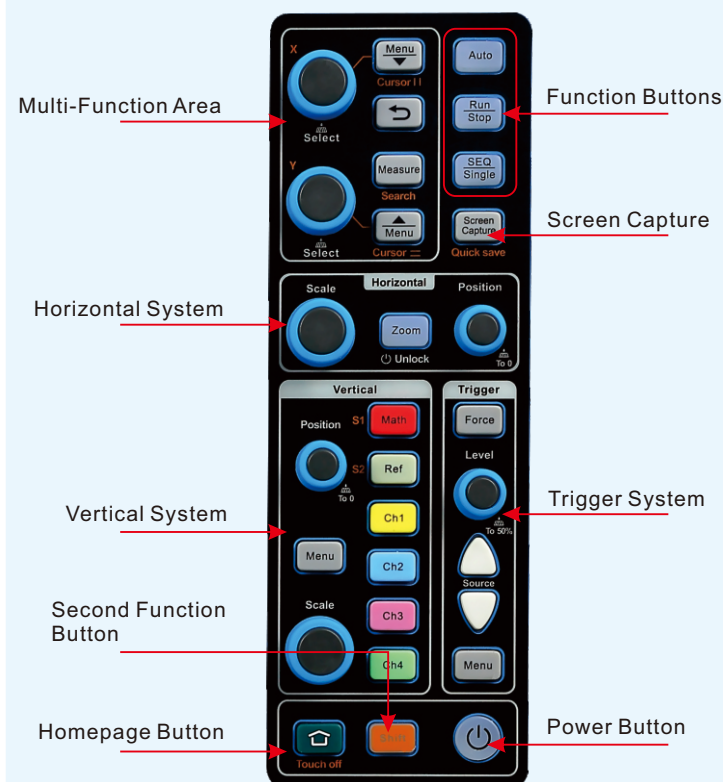

## Technical Features



### Ultra-high Waveform Capture Rate

Maximum 130,000wfms capture rate. By increasing the waveform capture rate, you see a more complete picture of what is going on with the signal.




### 31 Types of Auto Measurements

31 automatic measurements. Various automatic measurements can meet different measurement demand. It can be display all in one page.




### Powerful Trigger Functions

Support Edge, Pulse width, Short pulse (Underthrow), Logic, Video, Overtime, N\_Edge, Slope and other triggers. Simple and intuitive settings, swift trigger source switching mode, make the difficult part of oscilloscope application extremely easy.

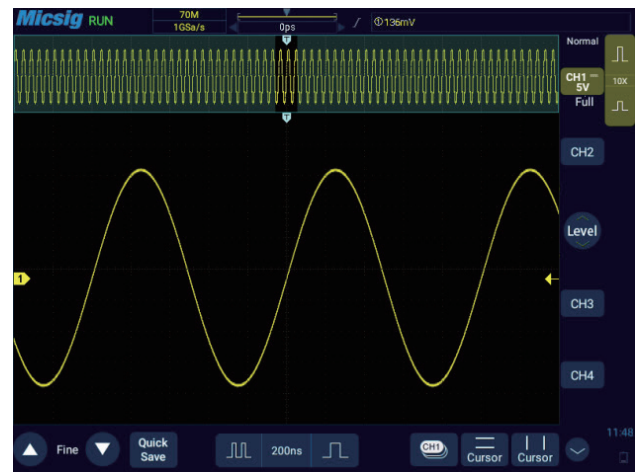

### Super Memory Depth

Up to 70Mpts memory depth, Zoom into a selected part of the captured waveforms to get more details.

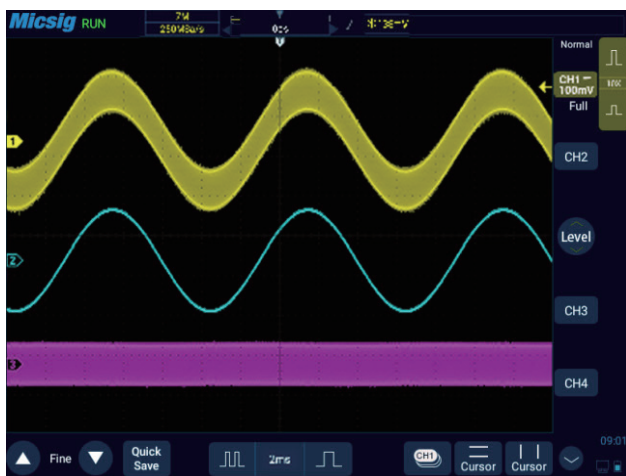


### Hardware High-pass / Low-pass Digital Filtering

Most engineers focus on the details of a certain frequency band of a signal. Filtering out insignificant frequency to eliminate interference, realizes a better judgement of the signal.




### Autoranging

STO1000 supports automatic measurements. The scope can adjust the amplitude and horizontal time base in real time, ensures the waveform is always displayed with a suitable size on the screen, more convenient and accurate, avoids complicated manual adjustments.

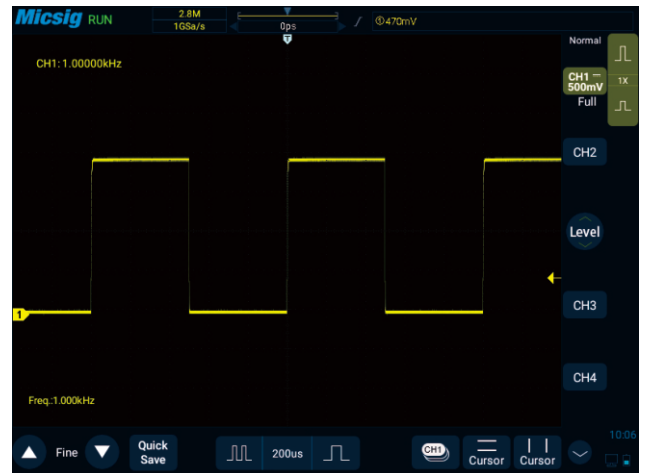

### High-precision Frequency Meter

Supports 6-bit hardware frequency meter, the accuracy is much higher than the soft solution frequency measurement, show more accurate measurement results.

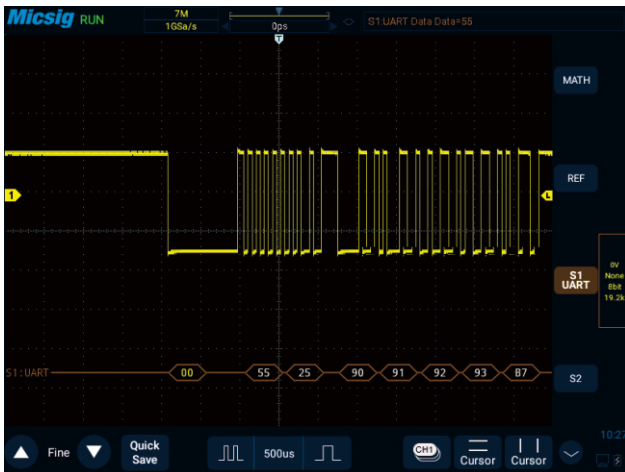


### Serial Bus Decoding and Analysis

Support serial triggering and decoding (I2C, SPI, RS232/UART, CAN, LIN)




### Decode Text Mode

Supports bus text decoding mode, able to store or export data for further analysis.

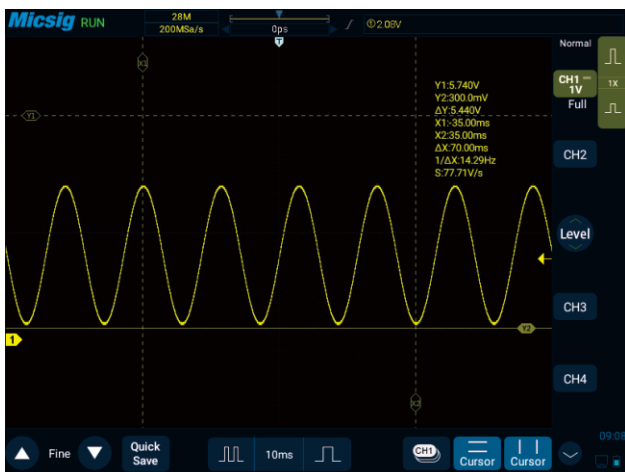


### Convenient Cursor Measurement

One soft touch to initiate horizontal and vertical cursors, each cursor can be moved independently. Simple two-point touch to track down the cursors, efficiency increased by 80%! No more traditional "anti-human" cursor operations!

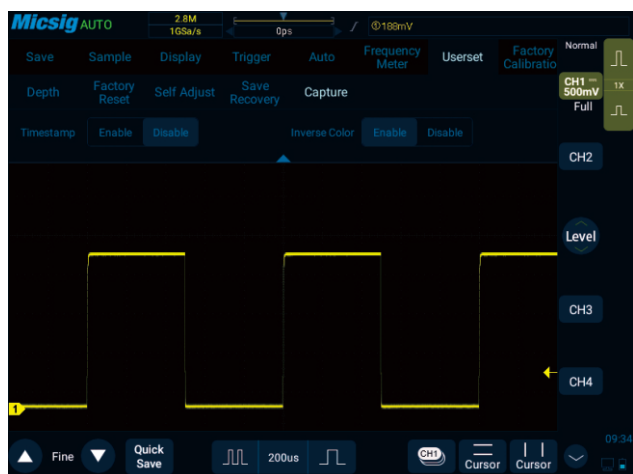


### Screenshot inverse and Timestamp

STO1000 supports adding time stamp and inverse color to screenshots, waveform are more concise and prominent, easy to record, meet the demands of our users to collect and organize.

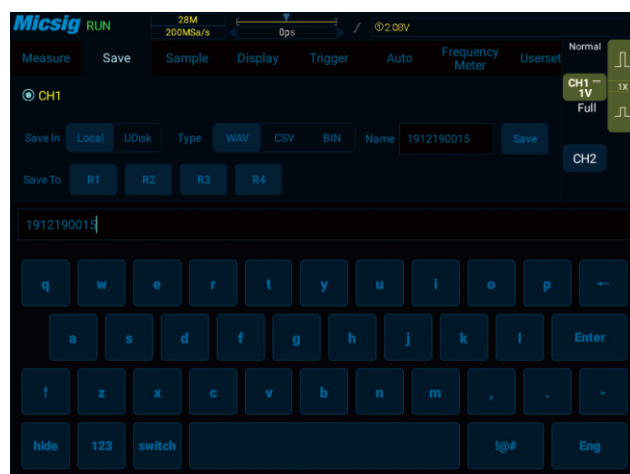


### Soft Keyboard Input

When entering the name, IP, and special characters, ordinary oscilloscopes can only be selected one by one through the knobs, while Micsig's can easily Input by clicking on the soft keyboard, increasing efficiency by 90%.

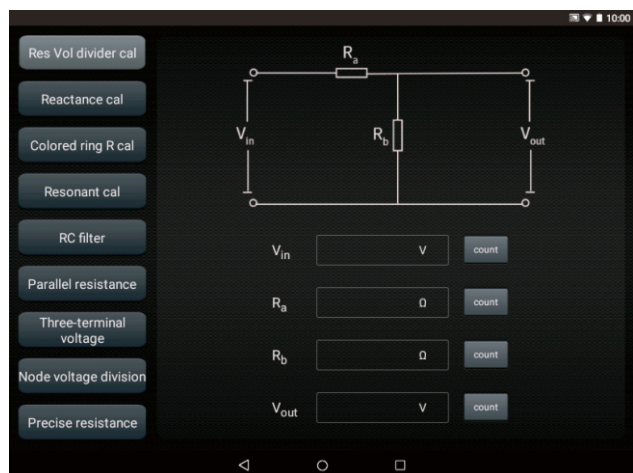

Electronic Calculation Tool Function

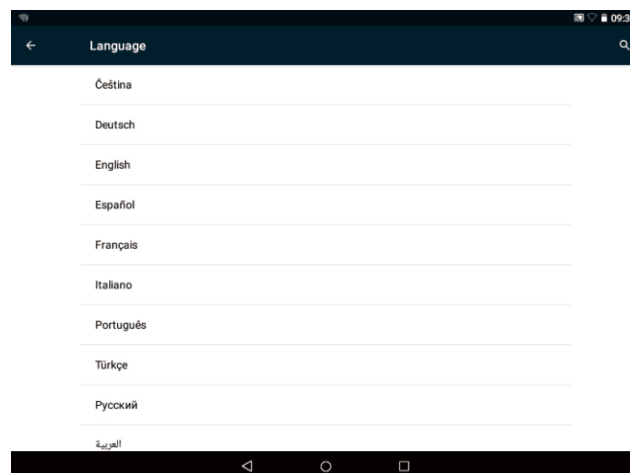

Support Simplified / Traditional Chinese, English



Unique oscilloscope mobile APP and PC software via Wi-Fi, USB, Wi-Fi LAN and LAN connection. Support transfer data from scope to PC via Wi-Fi and USB. Support Micro HDMI to connect scope and display directly.

## Product model

	STO1000C			STO1000E		
Model	STO1102C	STO1152C	STO1104C	STO1102E	STO1152E	STO1104E
Bandwidth	100MHz	150MHz	100MHz	100MHz	150MHz	100MHz
Channels	2	2	4	2	2	4
Rise time(calculated)	≤3.5ns	≤2.33ns	≤3.5ns	≤3.5ns	≤2.33ns	≤3.5ns
Real time sampling rate(1 Ch)	1G Sa/S	1G Sa/S	1G Sa/S	1G Sa/S	1G Sa/S	1G Sa/S
Real time sampling rate (2Ch)	500M Sa/S	500M Sa/S	500M Sa/S	500M Sa/S	500M Sa/S	500M Sa/S
Real time sampling rate (4Ch)	/	/	250M Sa/S	/	/	250M Sa/S
Peak mode(1 Ch)	1ns	1ns	1ns	1ns	1ns	1ns
Peak mode(2 Ch)	2ns	2ns	2ns	2ns	2ns	2ns
Peak mode (4 Ch)	/	/	4ns	/	/	4ns
Memory depth(1 Ch)	28M	28M	28M	70M	70M	70M
Memory depth(2 Ch)	14M	14M	14M	35M	35M	35M
Memory depth(4 Ch)	/	/	7M	/	/	17.5M

## Product parameters

### Vertical system

Bandwidth limitation	20MHz
Hardware Filtering	High pass (30KHz~ maximum bandwidth)/Low pass (maximum bandwidth ~30KHz)
Input coupling	DC、AC、GND
Input impedances	1MΩ±1%  14.5pF±3pF
Vertical resolution	8 bit
DC gain accuracy (Amplitude accuracy)	< ±2% (1MΩ input)
Vertical scale factor	≥40dB (100:1)
Channel-to-channel isolation DC to maximum bandwidth	1mV/div~10V/div (1MΩ input)
Offset range	± 2.5V (with probe multiple X1, <500mV/div), ±120V (with probemultiple X1, ≥500mV/div)
Noise	≤1mV
Maximum input voltage	CAT I 300Vrms (1MΩ input)

### Sampling system

Sampling mode	Real time sample rate
Peak sampling Sample rate 1G Sa/s	All the sampling glitches in scanning rate are narrow to single channel 1 ns, dual channel 2 ns .four channel 4ns
Maxduration in the max sampling rate Sample rate 1G Sa/s	28ms
Sample rate500M Sa/s	56 ms /28ms
Sample rate 250M Sa/s	112ms/56/28ms
Average	Average of sampling for N times N is chosen from 2, 4, 8, 16, 32, 64, 128, 256
Envelope	Envelope of sampling for N times N is chosen from 2, 4, 8, 16, 32, 64, 128, 256,∞

### Automatic

Auto setting	Automatically turns on/off channels, threshold level setting, and automatically sets the trigger source
Auto range	Vertical gear automatic, horizontal time base automatic, trigger level automatic

Trigger system	
Trigger mode	Normal,Auto,and Single
Trigger coupling	DC,AC,HF reject(>50KHz),LF reject(<50KHz),noise reject
Trigger holdoff range	200ns~10s
Trigger level ranges	±10 grids from the center of the screen
Trigger type	
Edge	Positive, negative, or either slope on any channel input. Coupling includes DC, AC, HF reject, LF reject, and noise reject.
Pulse Width	Trigger on width of positive or negative pulses that are >, <, =, ≠, or inside/outside a specified period of time (8ns~10s).
Logic	Trigger when any logical pattern of channels goes false or stays true for specified period of time (8ns~10s). Any input can be used as a clock to look for the pattern on a clock edge. Pattern (AND, OR, NAND,NOR) specified for all input channels defined as High, Low, or Don'tCare
Runt	By setting high and low thresholds, triggering pulses that span a level that does not cross another level captures positive and negative pulses
Time out	Starting from the intersection of the signal and the trigger level, Trigger when the trigger level is above (or below) the duration and reaches the set time
Slope	Trigger when the waveform's time from one level to another matches the set time condition
Video trigger	The triggering method for video signals is different depending on the video format. Generally, there are PAL/625, SECAM, NTSC/525, 720P,1080I, 1080P, etc.
Nth edge	Trigger on the Nth rising/falling edge of the waveform
Bus	<p>Trigger for the set bus, including UART, I2C, SPI, CAN, LIN, 1553B,429 bus</p> <p><b>UART:</b> start bit, stop bit, data, 0: data, 1: data, x: data, parity error</p> <p><b>I2C:</b> start condition, stop condition, acknowledge loss, restart, address field no acknowledgement, frame type 1, frame type 2, EEPROM data read and write, 10-bit write frame</p> <p><b>SPI:</b> CS, data, X data</p> <p><b>CAN:</b> frame start, remote frame ID, data frame ID, remote/data frame ID, data frame ID and data, error frame, all errors, acknowledgment errors, overload frames</p> <p><b>LIN:</b> Synchronous rising edge, frame ID, frame ID and data</p> <p><b>1553B:</b> instruction/status word sync header, data word sync header, instruction/status word, remote terminal address, Manchester code error, data word, odd parity error, all errors</p> <p><b>429:</b> word start, word end, LABEL, SDI, DATA, SSM, LABEL+SDI, Label+Data, Label+SSM, word error, word gap error, check error, all errors, all 0 bits, all 1 bit</p>
Horizontal system	
Time base range	2ns/div~1ks/div
Time base delay range	-14divisions to 14ks
Clock drift	≤±5ppm/year
Time base accuracy	±20ppm
Rollmode	200ms/div~1ks/div
Bus setup and decoding	
Display model	Graphic mode, list mode
Decoding type	UART,I2C,SPI,CAN,LIN,1553B,429
List mode	For uninterrupted decoding of collected data and can be saved
UART	<p>RX: Ch1, Ch2 , Ch3 , Ch4</p> <p>Idle level: high and low</p> <p>Check: no, odd, even</p> <p>Bits: 5, 6, 7, 8, 9</p> <p>Baud rate: 1.2K~8Mbps</p> <p>Display mode: hexadecimal, binary, ASC II code</p>

I2C	Data: Ch1 , Ch2 , Ch3, CH4 Clock:Ch1 , Ch2 , Ch3, Ch4
SPI	Clock: rising edge / falling edge Ch1 , Ch2 , Ch3, Ch4 Data: High/Low Ch1 , Ch2 , Ch3, Ch4 CS: High/Low Ch1 , Ch2 , Ch3, Ch4 Bits : 4 , 8 , 16 , 24 , 32
CAN	Source: Ch1 , Ch2 , Ch3, Ch4 Signal type: CAN_H,CAN_L,H_L,L_H,Rx,Tx Baud rate : 2.4K~625Kbps
LIN	Source :Ch1 , Ch2 , Ch3, Ch4 Idle level: high level / low level Baud rate : 2.4K~625Kbps
1553B	Source :Ch1 , Ch2 , Ch3, Ch4 Display:binary, hexadecimal
429	Source :Ch1 , Ch2 , Ch3, Ch4 Format:LABEL_DATA , L+D+SSM , L+SDI+D+SSM Display : binary, hexadecimal Baud rate : 12.5Kbs/100Kbps

### Display system

Display type	8"TFT LED Multi point touchable capacitive screen,24bit
Display resolution	800*600
Max touch point on touch screen	5
Operation way	Touch, button, touch + button
Afterglow time	Automatic,10ms~10s,∞
Time base format	YT,XY, Roll,Zoom
Expansion bench mark	Center, Trigger Position
Color temperature display	Support
Waveform display	Point, line, adjustable brightness
Grid	14*10 grid, adjustable brightness
Grey level	256levels
Waveform refresh rate	80,000wfms/s(STO1000C),13,0000wfm/s(STO1000E)
Time	Real time, user adjustable
Language	English,Chinese(standard),German, French, Czech, Korean, Spanish,Italian(Options)

### Storage





Storage format	Local,UDisk
Built-in storage	8G
Storage format	Csv,wav,Bin
Waveform storage number	Unlimited
Waveform storage name	Support
Display the reference waveform quantity	4 pcs
Screenshot	Support
Video recording and playback	Support
User setting number storage	10
User name setting	Support
Flash format	Support





Power source	
Power source voltage	100~240V AC,50/60Hz
Power consumption	<60W
Fuse	12V DC, 5A
Built-in Battery	7.4V , 7500mAh
Waveform measurements	
Cursor	Horizontal, vertical, cross
Auto measurements	31, of which up to five can be displayed on-screen at any one time. Measurements include: Period, Frequency, Rise Time, Fall Time, Delay, Positive duty Cycle, Negative Duty Cycle, Positive Pulse Width, Negative Pulse Width, Burst Width, Positive Overshoot, Negative Overshoot, Phase, Peak to Peak, Amplitude, High, Low, Max, Min, Mean, Cycle Mean, RMS, Cycle RMS.
Frequency counter	6
Waveform math	
Dual Waveform FFT	+ -* / Spectral magnitude. Set FFT Vertical Scale to Linear RMS or dBVRMS, and FFT Window to Rectangular, Hamming, Hanning, or Blackman-Harris.
Interface	
USB2.0 interface	Support 1 USB mass storage devices, can read and write
Micro USB2.0 interface	1, support read and write
DC interface	1, Oscilloscope power supply
Probe calibration port	1KHz, 2Vpp
LAN	Support
HDMI	1.4
WIFI	Support
Android APP	Support
IOS APP	Support
Computer software	Support
Environment	
Temperature	
Operating	0°C~45°C
Npn-operating	-40°C~60°C
Humidity	
Operating	5% to 85%, 25°C
Non-operating	5% to 90%, 25°C
Altitude	
Operating	<3000m
Non-operating	<12000m
Physical characteristics	
Dimensions	280*180*50mm
Weight	
Net	
2CH Bare	1340g
4CH Bare	1425g
Shipment	
2CH Bare	2745g
4CH Bare	2930g

## Accessory

Standard accessories Of STO1000 Plus

Model	Product	Parameters
1  P130A	Passive probe	Bandwidth:200MHz (One per channel)
2 	BNC cap	BNC cap (One per channel)
3 	Power cable	Dedicated Oscilloscope Power cable
4 	Adapter	12V DC, 5A





Model	Product	Parameters
5 	Dedicated Carry Strap	Leather Carry Strap
6 	Dedicated protective film	Anti-slip and anti-reflective
7 	Lithium Ion Battery	7.4V 7500mAh





Note:

“ ” Standard accessories for STO1000

“1~7” Standard accessories for STO1000 Plus

Optional Accessories

Model	Product	Parameters
	Oscilloscope handbag	Wear-resistant canvas material
	HDMI Cable	1.6m
 T3100	high voltage probe	Test current range: 0.1A-1000A Operation frequency: 10Hz-100KHz
 AC1000	AC current probe	Test current range: 0.1A-1000A Operation frequency: 10Hz-100KHz

Model	Product	Parameters
 DP10013	High-voltage differential probe	Bandwidth :100MHz Maximum input differential voltage(DC+AC PK-PK): 1300V
 DP20003	High-voltage differential probe	Bandwidth :100MHz Maximum input differential voltage(DC+AC PK-PK): 5600V
 CP2100A	AC/DC current probe	Bandwidth : 800KHz Vertical scale: 10A/100A
 CP2100B	AC/DC current probe	Bandwidth : 2.5MHz Vertical scale: 10A/100A

## Ordering information

### Step 1: Select STO1000 series basic models

STO1000 family	
STO1102C	Tablet touch digital oscilloscope, 100MHz 2 analog channels, single channel sampling rate 1G Sa/s, 28Mpts
STO1152C	Tablet touch digital oscilloscope, 150MHz 2 analog channels, single channel sampling rate 1G Sa/s, 28Mpts
STO1104C	Tablet touch digital oscilloscope, 100MHz 4 analog channels, single channel sampling rate 1G Sa/s, 28Mpts
STO1102E	Tablet touch digital oscilloscope, 100MHz 2 analog channels, single channel sampling rate 1G Sa/s, 70Mpts
STO1152E	Tablet touch digital oscilloscope, 150MHz 2 analog channels, single channel sampling rate 1G Sa/s, 70Mpts
STO1104E	Tablet touch digital oscilloscope, 100MHz 4 analog channels, single channel sampling rate 1G Sa/s, 70Mpts

### Step 2: Optional Software Configurations

Instrument option		
Software option		
UART	bus decoding	Suitable for all models
SPI	bus decoding	Suitable for all models
I2C	bus decoding	Suitable for all models
CAN	bus decoding	Suitable for all models
LIN	bus decoding	Suitable for all models
1553B	bus decoding	Suitable for all models
429	bus decoding	Suitable for all models

UART, SPI, I2C, CAN, LIN are standard options for STO1000 plus, optional for STO1000, 1553B and 429 are optional for all models.

The final interpretation right of this manual belongs to Shenzhen Micsig Instrument Co., Ltd

**Micsig**<sup>®</sup> Shenzhen Micsig Instruments Co., Ltd.

**Tel:** +86-755-86-88600880      **E-mail:** sales@micsig.com

**Web:** www.micsig.com

**Add:** No. 106, 1F, Bldg A, Huafeng International Robot Industrial Park, Hangcheng Avenue, Xixiang Sub-district, Bao'an District, Shenzhen, China

